



Event

Overview and Pricing

Kwik Office Models:



Side Chair with Arms (Q95-2D)

- Stacking
- 4-leg base
- 31"H x 23"W x 21"D



Side Chair without Arms (Q95-1D)

- Stacking
- 4-leg base
- 31"H x 20"W x 21"D



Ganging Devices (Q95-A)


- Package of 5 pairs
- 2 1/2"H x 5 3/4"W

Back and seat are fully upholstered. The seat is tilted back, and the back is slightly reclined for the user to assume a more natural, relaxed posture.

Legs are angled for stability and feature a textured, powdercoat finish (Cinder).

Stackable up to six chairs high.

Black, nylon ball glides are standard.

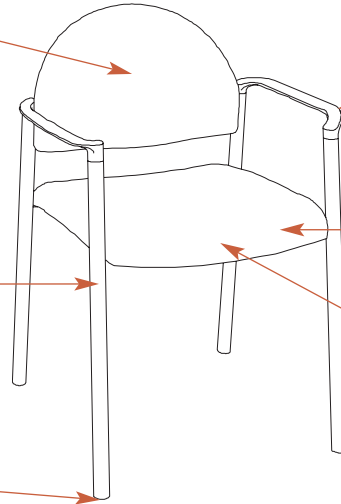

Arm caps are injection-molded nylon and attached to the frame with a pressure fit.

Cushions are high-resiliency, CFC-free, polyurethane foam. Seat cushion is 1 1/4" thick.

Waterfall front edge slopes forward to reduce pressure and increase circulation for the user's legs.

Features

Legs are 7/8"-diameter, 14-gauge tubular steel. Cross members are 3/4"-diameter, 14-gauge steel. Leg frames are joined to the cross members with metal inert gas (MIG) welds. Plastic end caps are fitted into the frames of armless models.

Seat pan is contoured, blow-molded polyethylene. Channels within the seat pan fit over the cross members. Seat pan is attached to the seat frame with four machine screws and T-nuts.

Seat upholstery is wrapped over the cushions and secured with upholstery staples.

Backs are constructed using an injection-molded polypropylene panel. They are secured to the frame with 4 countersunk flat-head screws, 11-gauge steel plates, and T-nuts.

Back upholstery, including 3/4"-thick foam for the inside back and 1/4"-thick foam for the outside back, is applied to the back as a slipcover and secured with upholstery staples.

Chairs are shipped three per carton when applicable. Ganging devices will be shipped inside chair carton if ordered at the same time.

Ganging devices, specified separately in sets of 5 pairs, are available to gang like models. Polypropylene devices snap onto chair legs. One pair is required to gang two chairs.

Transport dolly is available at standard lead times.
 ▶ See the Seating Price List.

How to Specify:

- Model:
Q95-2D = With arms
Q95-1D = Without arms
 - Back:**
 - Upholstery grade
 - Upholstery number
 - Seat:**
 - Upholstery grade
 - Upholstery number
 ▶ See page 122 for upholstery selections.
 - Frame:**
 - Finish type:
STD = Standard finish
 - Finish designator:
462 = Cinder
 - Glides:
STD = Nylon ball glides
- Sample (base model underlined):
 ① ② ③ ④ ⑤
Q95-2D 2 20020 2 20020
 ⑥ ⑦ ⑧
 STD 462 STD

Pricing:

Gr	Q95-2D	Q95-1D
1	\$290	\$271
2	\$316	\$297
6	\$398	\$379

Q95-A
 \$42

* Exception: Ganging devices are
GSA SIN 711-18

K Event Mobile

Kwik Office Models:



Mobile Chair with Arms (Q95-6D)

- 4-leg base with hard casters (C3)
- 31"H x 23"W x 21"D



Mobile Chair without Arms (Q95-7D)

- Stacking
- 4-leg base with hard casters (C3)
- 31"H x 20"W x 21"D

Overview and Pricing

Back and seat are fully upholstered. The seat is tilted back, and the back is slightly reclined for the user to assume a more natural, relaxed posture.

Legs are angled for stability and feature a textured, powdercoat finish (Cinder).


Models with arms stack up to four chairs high; models without arms stack up to six chairs high.

Black, hard casters are standard.

Features

Legs are 7/8"-diameter, 14-gauge tubular steel. Cross members are 3/4"-diameter, 14-gauge steel. Leg frames are joined to the cross members with metal inert gas (MIG) welds. Plastic end caps are fitted into the frames of armless models.

Seat pan is contoured, blow-molded polyethylene. Channels within the seat pan fit over the cross members. Seat pan is attached to the seat frame with four machine screws and T-nuts.

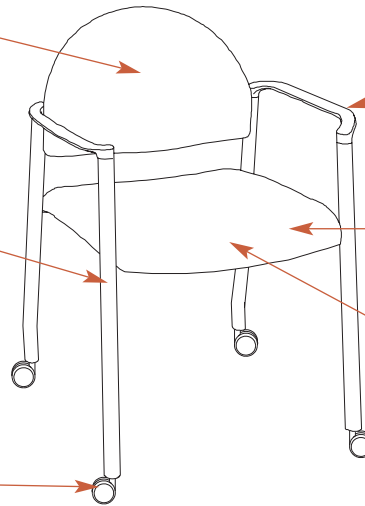

Arm caps are injection-molded nylon and attached to the frame with a pressure fit.

Cushions are high-resiliency, CFC-free, polyurethane foam. Seat cushion is 1 1/4" thick.

Waterfall front edge slopes forward to reduce pressure and increase circulation for the user's legs.

Seat upholstery is wrapped over the cushions and secured with upholstery staples.

Backs are constructed using an injection-molded polypropylene panel. They are secured to the frame with 4 countersunk flat-head screws, 11-gauge steel plates, and T-nuts.

Back upholstery, including 3/4"-thick foam for the inside back and 1/4"-thick foam for the outside back, is applied to the back as a slipcover and secured with upholstery staples.

Chairs are shipped three per carton when applicable.

Transport dolly is available at standard lead times.

▶ See the Seating Price List.

How to Specify:

- Model:
Q95-6D = With arms
Q95-7D = Without arms
- Back:**
- Upholstery grade
- Upholstery number
- Seat:**
- Upholstery grade
- Upholstery number
▶ See page 122 for upholstery selections.
- Frame:**
- Finish type:
STD = Standard finish
- Finish designator:
462 = Cinder
- Casters:
C3 = Hard casters

Sample (base model underlined):

① ② ③ ④ ⑤
Q95-6D 2 20020 2 20020
 ⑥ ⑦ ⑧
 STD 462 C3

Pricing:

Gr	Q95-6D	Q95-7D
1	\$337	\$318
2	\$363	\$344
6	\$445	\$426