

Scenario™

X-Base and Height Adjustable X-Base

Tools Required

- Phillips Screwdriver #2 Bit, ■ Level
- Hardened

Package Contents

- (6) #10 x ½" Flathead Screws ■ (4) #8 x ½" Panhead Screws

Installation

1. The X-base and height-adjustable X-base are already fully assembled, including casters and or levelers. (Figure A).
2. Place the table top on a clean dry surface with the underside facing upward. The underside of the worksurface has holes pre-bored for attachment of the base. Align the base so the table legs point to the corners of the table (square tops only, does not apply to round tops). (Figure B).
3. Attach the table base to the table top using (6) #10 x ½" flathead screws provided. Height-adjustable X-bases have a cable release paddle. Remove the cover from the release paddle and attach to underside of table using (2) #8 x ½" panhead screws provided. Replace cover. Attach cable clips to underside of table using (2) #8 x ½" panhead screws provided. (Figure C).

Figure A

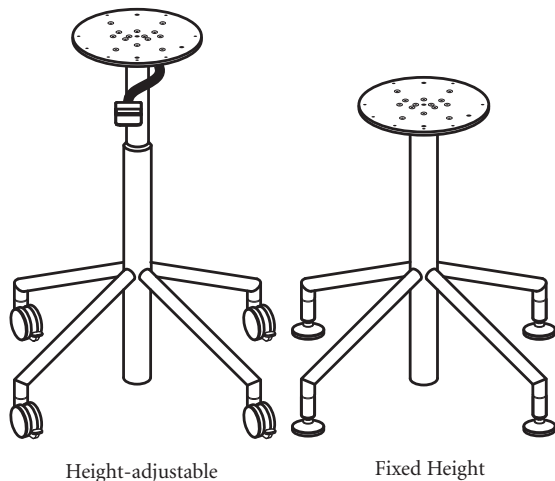


Figure B

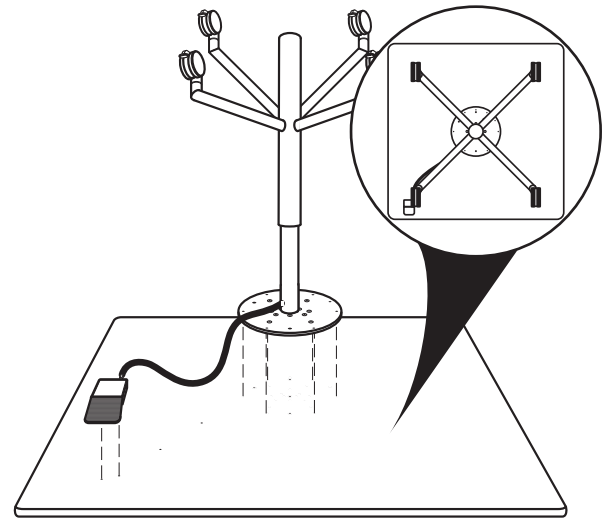


Figure C

