


These instructions provide the basic information for installing replacement plastic corners and top brackets on the Flexboard.

1 If Top Bracket is to be replaced, remove plastic corner nearest to that bracket. Even if both Top Brackets are being replaced, only one corner needs to be removed. Use slotted screwdriver or other flat, blunt tool to gently pry edges of front and back sides of plastic corner. Use care to avoid marring finish of Flexboard frame (Figure A). If only plastic corner is being replaced, proceed to Step 6.

Figure A

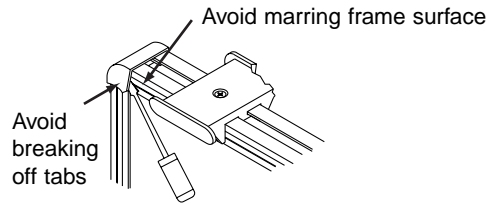

2 After corner is removed, use Phillips screwdriver to remove mounting screw from top bracket(s) (Figure B).

Figure B






Figure C



3 Slide old bracket(s) out of channel in Flexboard frame (Figure C).


4 Slide new bracket(s) into Flexboard channel, ensuring bracket flange is inside channel reveal. Position bracket(s) over mounting hole in channel (Figure D).

Figure D

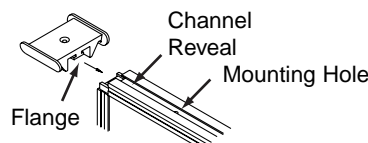


5 Use new mounting screw to attach bracket(s) to frame by inserting screw through bracket and into mounting hole (Figure E).

Figure E



6 Replace plastic corner on Flexboard frame by gently prying out sides of corner with screwdriver on the front and back sides of frame while pushing corner into position. Avoid breaking retainer tabs off of plastic corner and use care not to mar surface of Flexboard frame (Figure F).

Figure F

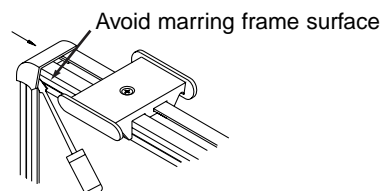

TRAXX®
Assembly Instructions

**Flexboard
Top Bracket
and
Plastic Corner
Replacement**

Recommended Tools

- Slotted Screwdriver
- Phillips Screwdriver

**Package
Contents**

Qty.

- | | |
|------------------|---|
| • Top Bracket | 1 |
| • Mounting Screw | 1 |
| • Plastic Corner | 2 |



Telephone 800.482.1818
Fax 812.482.8300
www.furniture.kimball.com

Form #AISYTR010-00
#1469027

Printed in U.S.A.
© 2000 Kimball International, Inc.

Proper product installation, in accordance with these instructions, is the responsibility of the installing agent. If you have any questions concerning these instructions, please call Kimball Customer Care Teams.