

Power/Data Grommet Insert

Tools Required

- None

Package Contents

- 1 Power/Data Grommet Insert

General Information

- The power/data grommet insert can be located in any worksurface. It is used when it is desirable to have access to electrical power and telephone/data at the worksurface. Excess cabling can be routed under the worksurface through an opening in the metal cap.
- Check for clearance under worksurface **BEFORE** boring to avoid brackets, panels or similar interferences.
- Fits G7 grommet/option on Evoke, Definition, Transcend, Senator, President, Innsbruck, and Osterley Park.

Installation

1. If worksurface has existing grommet, remove the plastic trim ring that came with the metal grommet cap, and replace it with the power/data grommet insert cup. (Figure A).
Note: If worksurface does not contain grommet, refer to Grommet Installation assembly instructions.
2. A universal knock-out is a feature of the power/data connector cup. The knock-out will work with the following data ports:
 - Amp - 1.800.522.6752
 - Panduit - 1.800.777.3300 ex. 1884
 (Figure B).

Figure A

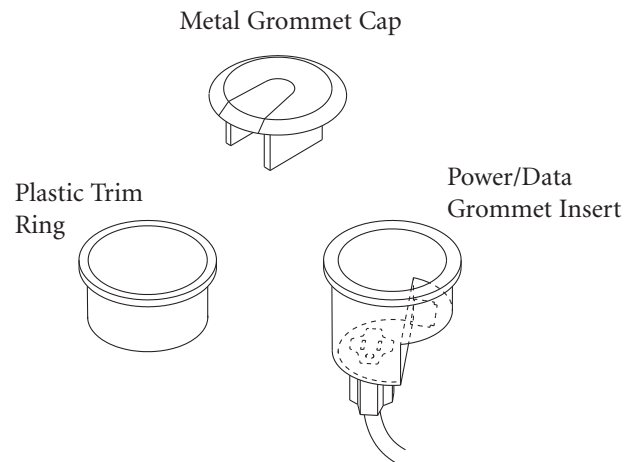


Figure B

