

# Transcend™

## Hinge Adjustment

### Tools Required

- Phillips Screwdriver

### Installation

#### 1. Side Adjustment:

Turn front screw clockwise to increase door overlay, counterclockwise to decrease overlay. (Figure A).

#### 2. Depth Adjustment:

Loosen back screw. Adjust door to desired position and tighten screw. (Figure B).

#### 3. Height Adjustment:

Loosen screws on the mounting plate. Adjust door to desired position and tighten screws. (Figure C).

#### 4. Door Removal and Installation:

Release lever under the hinge arm, pull to remove. To re-install, place the hinge on the mounting plate and push the rear of the hinge with finger pressure. The snap sound confirms a secure attachment. (Figure D).

Figure A

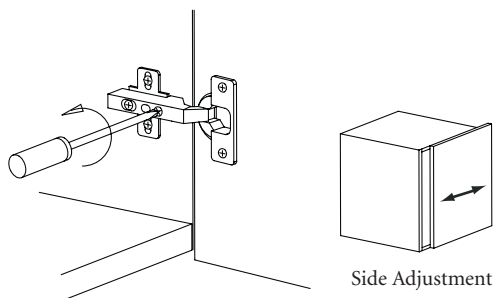


Figure B

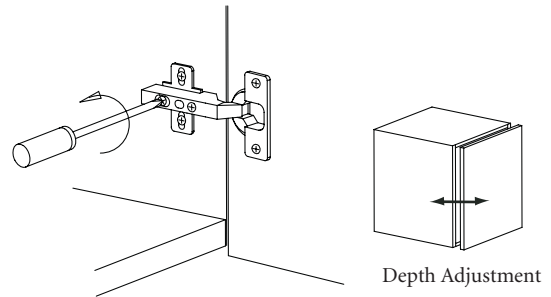


Figure C

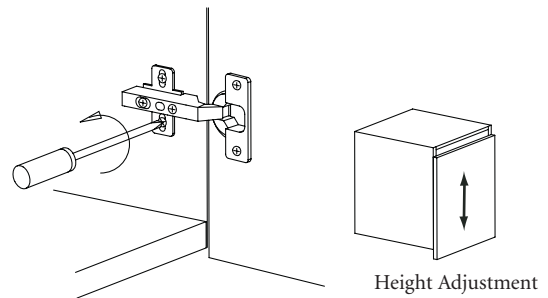


Figure D

