

Aspire®

Field Install Bolt To Lock Static Leg

Tools Required

- #5 Hex Driver
- Adjustable Wrench

Package Contents

- 1 Table/Frame Assembly
- 4 Bolts
- 4 Casters or Glides

Installation

1. Place table assembly face down on a smooth, solid surface. Be careful not to mar the worksurface. (Figure A).
2. Rotate one leg assembly to the vertical position and align the holes in the leg assembly with the holes in the table frame. Screw in one machine screw on each side to secure legs. (Figure B).
3. Repeat Step 2 to secure second leg assembly. (Figure C).

Figure A




Figure B


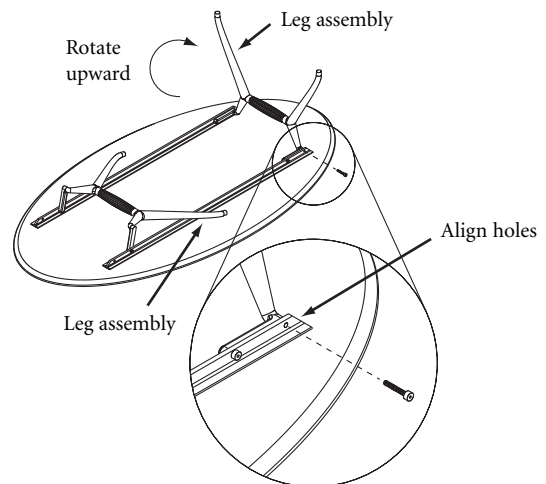


Figure C

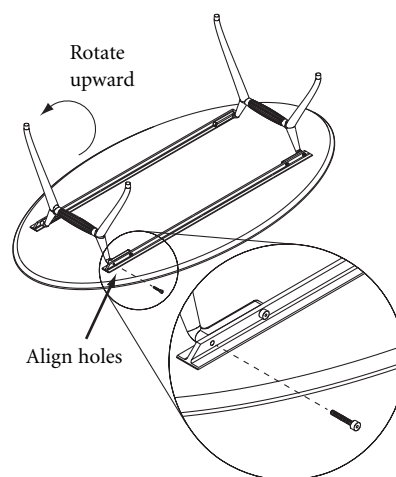

Proper product installation, in accordance with these instructions, is the responsibility of the installing agent. If you have any questions concerning these instructions, please call Kimball Office Customer Care.

Kimball®Office

Aspire

Installation (continued)

4. Attach glides or casters to legs. Glides and casters screw in.
Firmly tighten all bolts on table frame. (Figure D).
5. Carefully turn table to upright position. (Figure E).

Figure D




Figure E

