

Conferencing Solutions

Tables Assembly Instructions

Tools Required

- # 2 Phillips Head Bit
- Power Screwdriver
- Tape Measure

Package Contents

- Tapered Column Leg (Quantity per order)
- # 12 X 1" Panhead Screw (Quantity of 7 per leg)

Installation

1. The Tapered column Leg comes either as a static or mobile (caster) leg. The lower leveler and/or caster must be threaded into the nut assembly at the bottom of the leg. (Figure A).
2. Make sure work area is clean. Place worksurface upside down on a smooth, hard surface. To attach leg to rectangular worksurface, position leg approximately 2 1/2" off the inside edge of the worksurface edgeband. Attach each leg with seven #12 x 1" panhead screws. (Figure B).
3. When installing legs on trapezoid shaped tops, make sure to turn legs outward from the center of the table. Position the legs approximately 2 1/2" off the inside edge of the worksurface edgeband. Attach each leg with seven #12 x 1" panhead screws. (Figure C).
4. When installing legs on crescent shaped tops, make sure to turn legs outward from the center of the table. As a general rule, the center of the leg is located 4" from the edge of a flat rim, and 5" from the edge of a knife edge. Attach each leg with seven #12 x 1" panhead screws. (Figure D).

Figure A

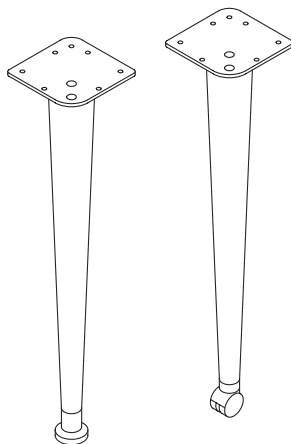


Figure B

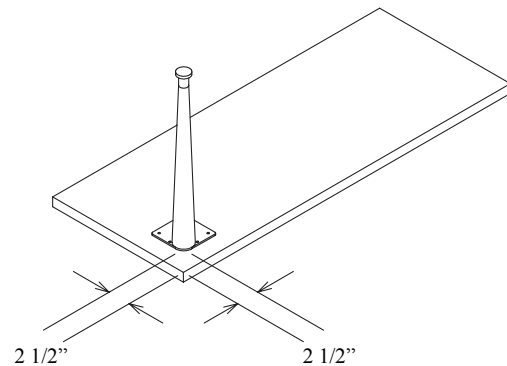


Figure C


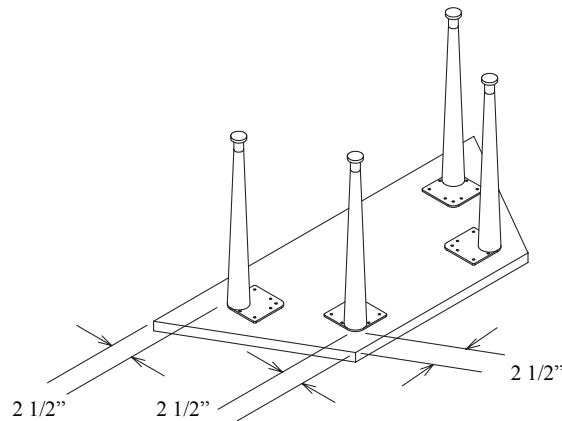


Figure D

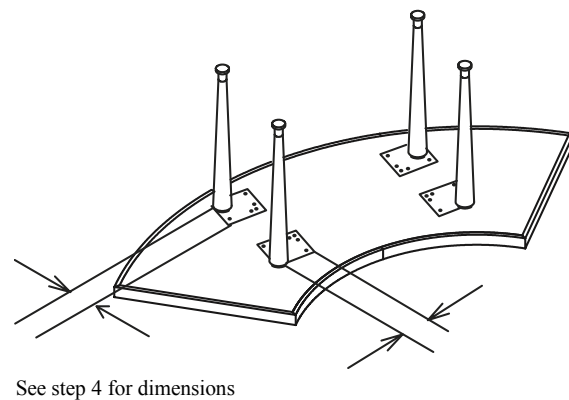

Conferencing Solutions

Tables Assembly Instructions

5. When installing legs on quarter round tops, make sure to turn legs outward from the center of the table. Position the legs approximately 2 1/2" off the inside edge of the worksurface edgeband. Attach each leg with seven #12 x 1" panhead screws. (Figure E).
6. When installing legs on half round tops, make sure to turn legs outward from the center of the table. Position the legs approximately 2 1/2" off the inside edge of the worksurface edgeband. Attach each leg with seven #12 x 1" panhead screws. (Figure F).

Figure E

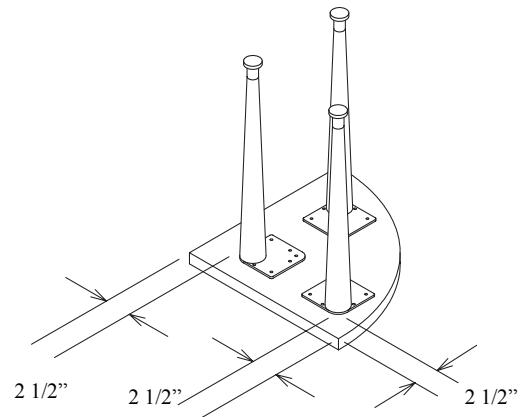


Figure F

