

## Stackable Panel

### Adding a Stackable Panel

#### Tools Required

- Cordless Drill/Driver
- Putty Knife
- "L" Spacers
- Socket Wrench
- Rubber Mallet
- Black Marker

#### Package Contents

- Top Connector Bracket
- Stackable Panel with Foam Blinder
- Hook Bracket

#### Installation

1. Carefully remove panel top caps by prying up one end with a putty knife or similar tool; set aside to re-use. (Figure A).
2. Remove center spring clip from any lower panel which will have a stackable panel above it. (Figure B).

**Note:** Use black marker to darken frame bracket of lower panel before installing stack panel.

3. Place stackable panel centered left to right on top of lower panel. Place two (2) 1/4" "L" Spacers on each end of panel. (It is recommended to "bridge" the "L" Spacers between panels). Carefully use rubber mallet to firmly seat "U" channel into spring brackets of lower panel and ensure stacker rests against spacers. Strike mallet only against studs on brackets, not fabric or wood parts of the panel. Leave spacers in place until entire section has been finished, brackets tightened and top caps replaced. Add additional panels as required, making sure "J" channels interlock. (Figure C).

**Note:** Panels must be fully engaged in spring brackets to allow alignment and proper height of end trim and connector posts.

Figure A

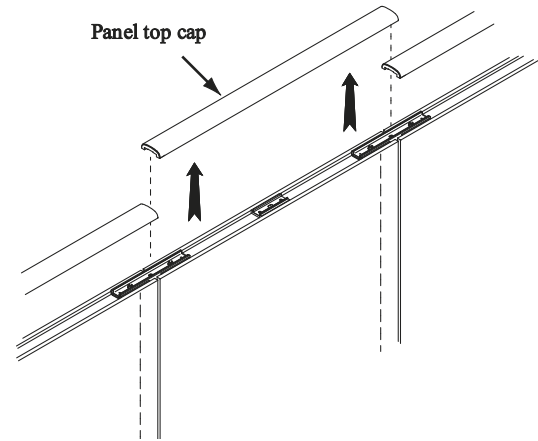


Figure B


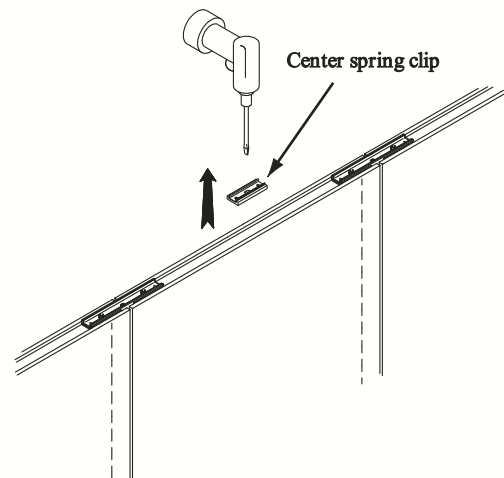


Figure C

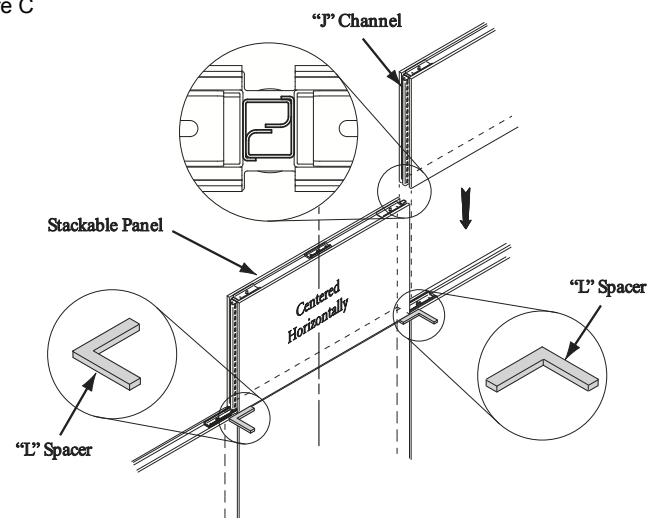

## Installation (continued)

4. Join the stackable panels together using the top connector brackets and nuts. (Figure D). If panels are not the same height across, slide hook bracket (provided) down "J" channel of taller panel and attach to lower panel using nut provided. (Figure D). Remove center spring clip from any lower panel which will have a stackable panel above it. (Figure D).
5. Replace panel top caps saved from Step 1. Align ends of top cap with the vertical edges of the panel. Carefully tap with a rubber mallet until top cap is fully seated on panel. (Figure E).
6. Remove "L" spacers for future use.

Figure D

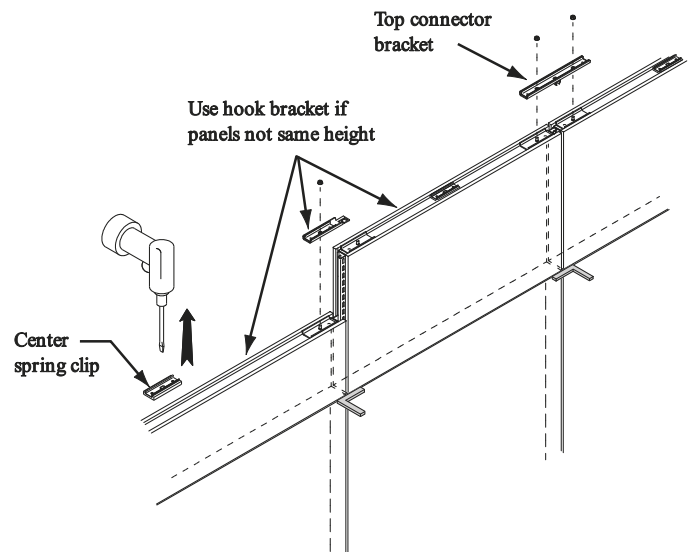


Figure E

